
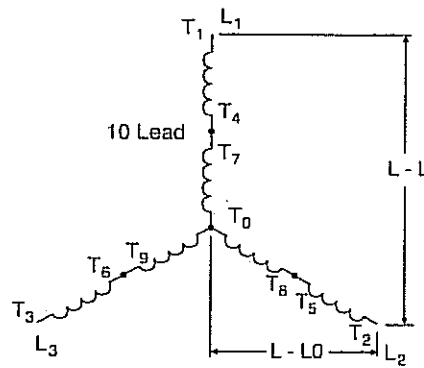


Technical Data



Connection Diagrams

SERIES HIGH WYE

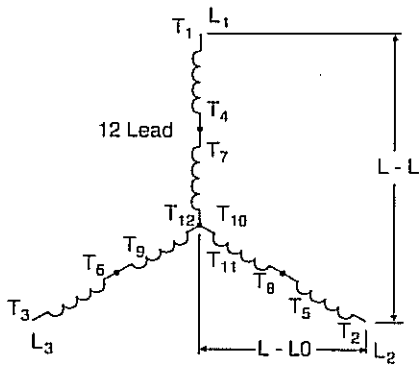



Voltage		
HZ	L-L	L-L0
60	380	219
	416	240
	440	254
	460	266
	480	277
50	380	219
	400	231
	415	240
	440	254

PARALLEL LOW WYE

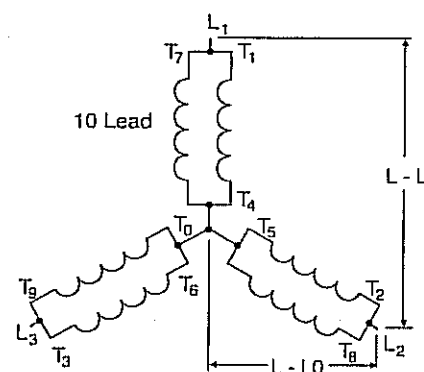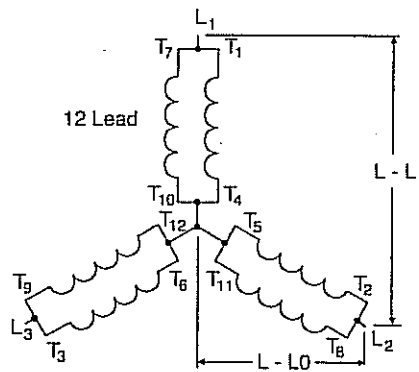

Voltage		
HZ	L-L	L-L0
60	190	110
	208	120
	220	127
	230	133
	240	139
50	190	110
	200	115
	208	120
	220	127


WYE

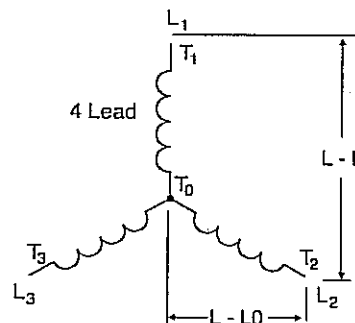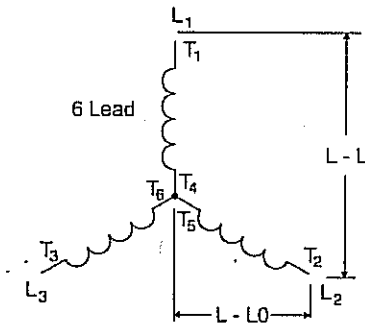

Voltage		
HZ	L-L	L-L0
60	380	219
	480	277
	600	346
	2400	1386
	3300	1905
	4160	2402
	6600	3811
50	380	219
	400	231
	415	240
	3300	1905
	6600	3811
	11000	6351


SERIES HIGH DELTA

Voltage		
HZ	L-L	L-L0
60	240	120
	277	139
50	200	100
	220	110
	240	120

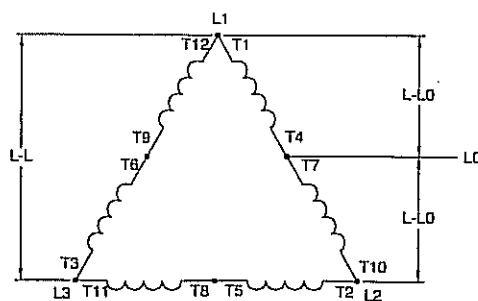

PARALLEL LOW DELTA

Voltage	
HZ	L-L
60	110
	120
50	100
	110

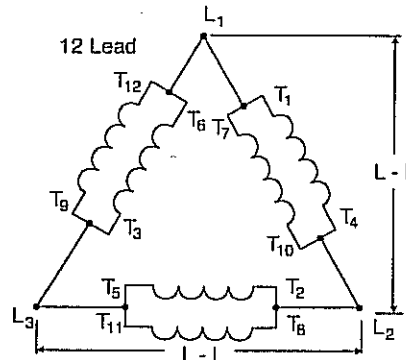


Technical Data

Connection Diagrams

DELTA


Voltage		
HZ	L-L	
60	2402	
	7967	
50	1905	
	6351	

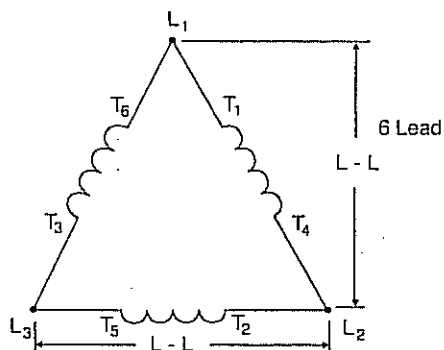

DOUBLE DELTA

* Single Phase Connection

Voltage		
HZ	L-L	L-L0
60	200	100
	220	110
	240	120
50	220	110

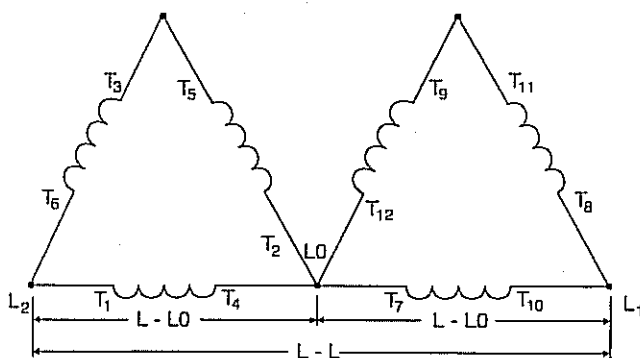


PARALLEL

LOW ZIGZAG

* Single Phase Connection

Voltage		
HZ	L-L	L-L0
60	200	100
	220	110
	240	120
50	220	110

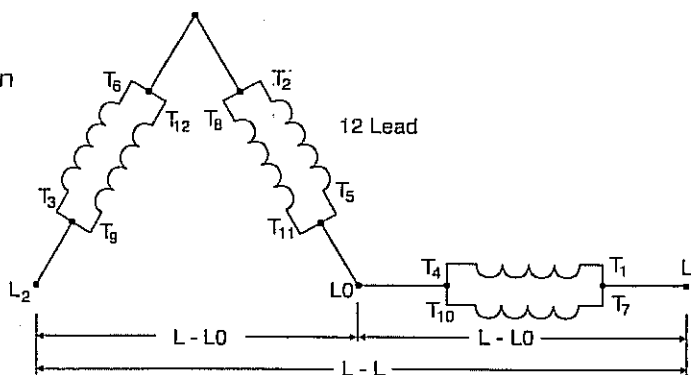


SERIES

HIGH ZIGZAG

* Single Phase Connection

Voltage		
HZ	L-L	L-L0
60	480	240

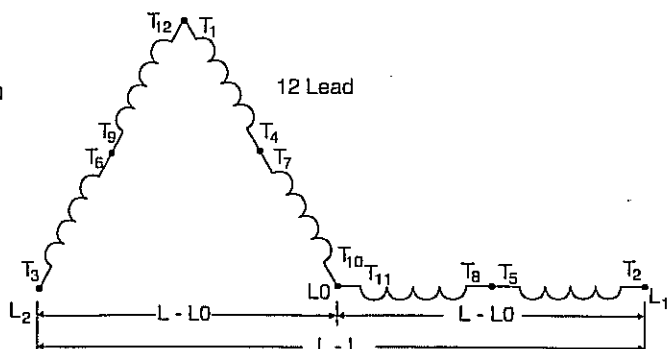

* Note: Single phase kW/kVA ratings are approximately equal to 50% of the generator's three phase ratings